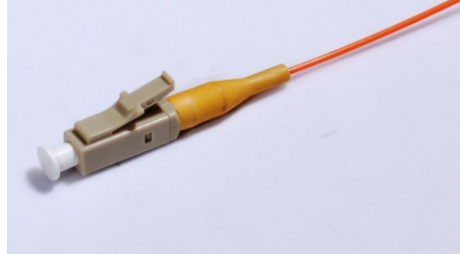
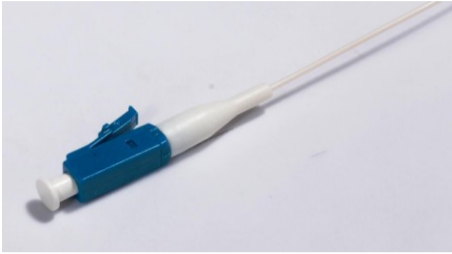


**LC Fiber Optic Pigtaills**

Single mode LC/UPC pigtail

Multimode LC/UPC pigtail

Single mode LC/APC pigtail

**LC Fiber optic pigtails specifications**

PC, UPC or APC polishing

Fiber Standards:

Single mode fiber: ITU - T G. 652

Multi mode fiber: ITU - T G.651

\*Standard: Telcordia GR-326-CORE

\*Standard housing, ceramic ferrule

\*Cable diameter: 3.0mm or 2.0mm or 0.9mm

\*Fiber type: 9/125 $\mu$ m, 62.5/125 $\mu$ m or 50/125 $\mu$ m or 10G

\*Insertion loss: SM Less than 0.3 dB, MM Less than 0.3dB

\*Return loss: PC SM larger than 45 dB

UPC SM larger than 50dB

APC SM larger than 60dB

UPC MM larger than 20dB

\*Repeatability: Less than 0.2 dB

\*Changeability: Less than 0.1 dB

\*Operating temperature range: -40°C ~ 80°C

\*Storage temperature range: -40°C ~80°C

\*Tensile strength: 100N

\*Min. bending radius: 35mm

For detailed inquiry please contact our sales team at: [sales@HuihongFiber.com](mailto:sales@HuihongFiber.com).