



LC Fiber Optic Pigtaills

Single mode LC/UPC pigtail

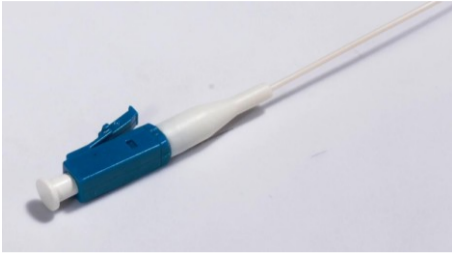

Multimode LC/UPC pigtail

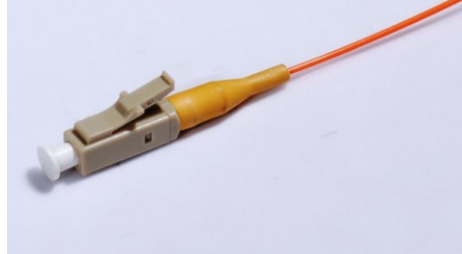

Single mode LC/APC pigtail

LC Fiber optic pigtails specifications

PC, UPC or APC polishing

Fiber Standards:

Single mode fiber: ITU - T G. 652

Multi mode fiber: ITU - T G.651

*Standard: Telcordia GR-326-CORE

*Standard housing, ceramic ferrule

*Cable diameter: 3.0mm or 2.0mm or 0.9mm

*Fiber type: 9/125 μ m, 62.5/125 μ m or 50/125 μ m or 10G

*Insertion loss: SM Less than 0.3 dB, MM Less than 0.3dB

*Return loss: PC SM larger than 45 dB

UPC SM larger than 50dB

APC SM larger than 60dB

UPC MM larger than 20dB

*Repeatability: Less than 0.2 dB

*Changeability: Less than 0.1 dB

*Operating temperature range: -40°C ~ 80°C

*Storage temperature range: -40°C ~80°C

*Tensile strength: 100N

*Min. bending radius: 35mm

For detailed inquiry please contact our sales team at: sales@HuihongFiber.com.