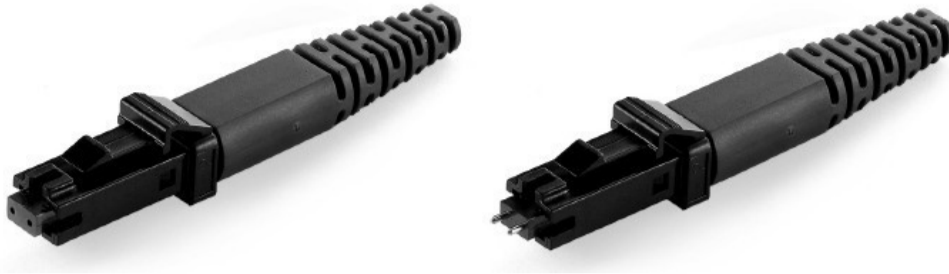


**MTRJ Fiber Optic Connectors****MTRJ fiber optic connector features**

Precision molded MT ferrule  
High precision guide pins for exact alignment  
Duplex ferrule  
Plug-jack (RJ-45) design  
TIA/EIA 568-A Compliant\*

**MTRJ fiber optic connectors specifications**

MTRJ connectors	Single mode	Multimode
Insertion Loss	≤0.20dB	≤0.25dB
Return Loss	≥45 dB (PC)	
Durability	<0.20 dB typical change, 1000 mating	
Operating Temperature	-40 to + 80°C	
Ferrule Hole Sizes	126.0+1/-0μm	127 +1/-1 μm

For detailed inquiry please contact our sales team at: [sales@HuihongFiber.com](mailto:sales@HuihongFiber.com).