


**SC Fiber optic attenuator**





**SC/UPC fiber optic attenuator**

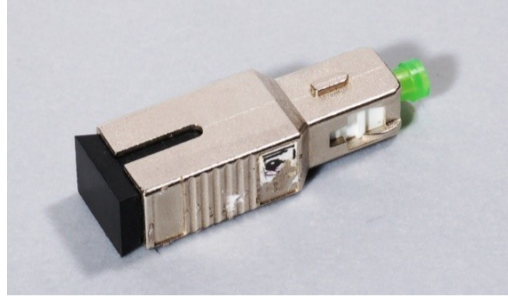

**SC/APC fiber optic attenuator**

**Other plug type attenuator,SC,FC,ST,LC,MU types,UPC,APC types available.**

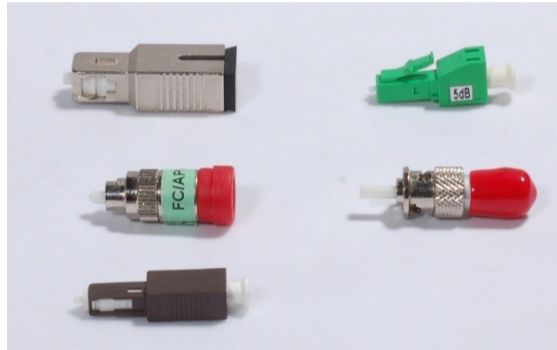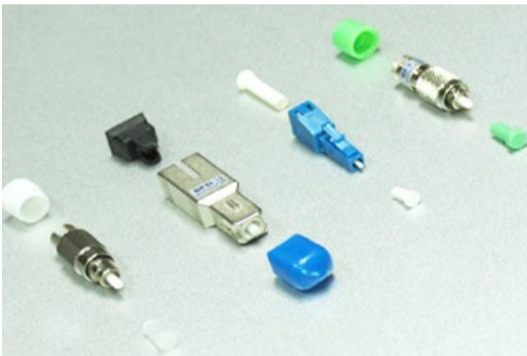

**SC Fiber Optic Attenuators Features**

- Bellcore Compliant
- Wavelength Independent
- Durability (well over 100mw)
- Simple and Reliable Structure

**SC Fiber Optic Attenuators Specifications**

- Operating Wavelength: SM: 1200-1600nm or 1310nm, 1550nm
- Return Loss:
  - Less than 50 dB (SPC)
  - Less than 55 dB (UPC)
  - Less than 65 dB (APC)
- Attenuation Accuracy: +/-0.5 (1-10)
- +/-1.0 (11-30)
- Polarization Dependent Loss: Less than 0.2dB
- Maximum Optical Input Power: 200mW
- Operating Temp Range: -40 ~ 80° C

**For detailed inquiry please contact our sales team at: [sales@huihongfiber.com](mailto:sales@huihongfiber.com) .**